


Rope Fastening (With Spring)



Installation Dimension:

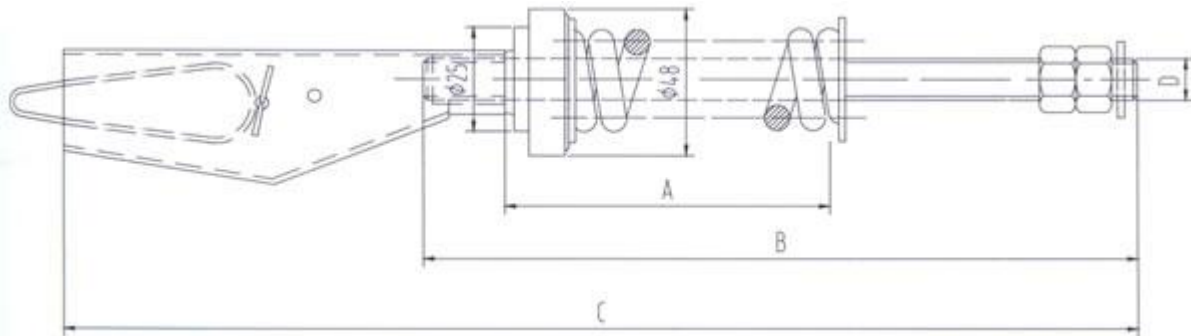

Specification:

| Specification | Dia(Steel Wire) | A | B | C | D | Mounting Hole |
|---------------|-----------------|-----|-----|-----|-----|---------------|
| QSD08W | 8MM | 100 | 245 | 375 | M14 | 26 |
| QSD09.3W | 9.3MM | 100 | 245 | 395 | M14 | 26 |
| QSD10W | 10MM | 120 | 343 | 490 | M16 | 26 |
| QSD11W | 11MM | 120 | 343 | 490 | M16 | 26 |
| QSD12W | 12MM | 130 | 343 | 490 | M16 | 26 |
| QSD13W | 13MM | 158 | 398 | 580 | M18 | 30 |
| QSD16W | 16MM | 180 | 460 | 620 | M20 | 22 |